

New



AF-6 Series Drives

Built-in features
Built-in simplicity



GE imagination at work

Built-in simplicity speeds set-up

The removable keypad, common to all AF-6 Series drives, is your window into all programming and information elements.

The keypad INFO key⁽¹⁾ provides full-text, context-sensitive information to make programming easier and can eliminate the need for printed manuals. In most cases, start-up can be completed in less than 5 minutes – saving you valuable time.

You can set up one drive and then copy settings to other drives using the hot pluggable feature, eliminating the need for duplicate programming.

The Quick Menu provides easy access to all the basic settings and the controller.

- Hot pluggable
- Illuminated LCD display
- Parameters & their values
- Unit indications
- Rotation direction indication
- Set-up indication
- Custom user displays
- Trended charts display speed, torque, current⁽¹⁾
- Full alarm messages & descriptions⁽¹⁾

(1) Excluding AF-60 LP

Built-in features lower your total cost

So much is already built in to AF-6 Series drives, you'll need fewer add-ons.

Discover how fast installation can be and realize a lower total cost.

- Built-in process PID controller optimizes operation
- Built-in communication networks for Modbus RTU, Metasys N2 and Apogee FLN P1 for the AF-600 FP drive
- Built-in logic controller eliminates the need for and cost of many additional controls
- Built-in fan & pump macros for the AF-600 FP drive
- Built-in DC link reactors ensure very low harmonic disturbance of the power supply (excluding AF-60 LP)
- Built-in brake chopper option eliminates separately mounted dynamic brake unit
- Built-in Class RFI eliminates the cost of additional components
- Automatic energy savings delivers better system efficiency
- Auto-tuning optimizes motor performance and reduces set-up time



Actual size



AF-60 LP™ Micro Drive

Built for ... small motor control

The AF-60 LP is built right for all those variable frequency applications requiring macro performance from a micro drive.

Ready to go, right from the start

- Self protecting features
- 150% current overload up to 1 minute
- Flying start (catch a spinning motor)
- Precise stop function
- Electronic thermal overload
- Easy to use PC software
- Potentiometer on each keypad

Built-in durability

- Robust housing (IP20) protects the drive and allows side-by-side mounting with no de-rating
- Conformal coated circuit boards and high quality capacitors maximize uptime
- Intelligent heat management leads to long life
- RoHS compliance makes for environmental responsibility
- Standards: CE, UL, cUL, C-Tick


Utter simplicity in installation and set-up

Right out of the box – which features the wiring diagram and template right on the lid, and which holds the Quick Guide – the AF-60 LP makes installation and set-up a snap.

An optional DIN rail mounting kit is available up to and including 2.2kW drives.



Open Chassis/IP20 drive.

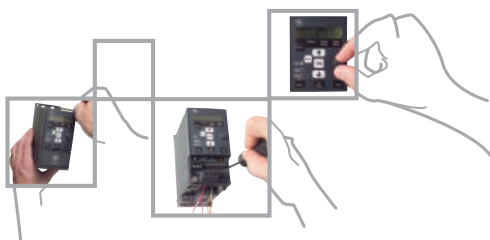

AF-60 LP ratings

kW	230V 1Ph	230V 3Ph	400/460V 3Ph
0.18			
0.25			
0.37			
0.75			
1.5			
2.2			
3.7			
5.5			
7.5			
11			
15			
18.5			
22			



AF-600 FP™ Fan & Pump Drive

Built for ... HVAC and pump motor control

The AF-600 FP drive has been optimized for the range of variable torque applications, including fans, compressors and pumps. Its size makes it easy to mount in a control panel, and its dedicated features include sophisticated controls that make it a perfect match for HVAC solutions.

All the features HVAC needs

- Built-in communication networks for ModBus RTU, Metasys N2 and Apogee FLN P1
- Field Installed Network Options: BACnet, LonWorks, Profibus DP, Profinet, Modbus TCP/IP, Ethernet/IP and DeviceNet
- Self protecting features
- 110% current overload for 1 minute
- Flying start (catch a spinning motor)
- Precise stop function
- Electronic thermal overload
- Easy to use PC software
- Energy monitoring feature
- Flow compensation
- Pump cascade controller
- Sleep mode
- Automated resonance monitoring
- Fan belt monitoring
- Stairwell pressurization
- Fire override mode
- Standards: CE, UL, cUL, C-Tick

Stand-alone drive types

For drives rated up to and including 90kW

- IP20/chassis
- IP21/NEMA 1 Field Installed Kit

For drives rated 110kW or more

- IP00/chassis
- IP21/NEMA 1

For all drives

- IP54 /55/NEMA 12



NEMA 1/IP21 shown with optional field-installed kit

AF-600 FP ratings

kW	230V 3Ph	400/460V 3Ph	690V 3Ph
0.75	IP20, IP21/ NEMA 1 kits	IP20, IP21/ NEMA 1 kits	IP21/ NEMA 1
1.5			
2.2			
4			
5.5			
7.5			
11			
15			
18.5			
22			
30	IP55/ NEMA 12	IP55/ NEMA 12	IP54/ NEMA 12
37			
45			
55			
75			
90			
110			
132			
160			
200			
250			
315			
355			
400			
450			
500			
560			
630			
710			
800			
1000			
1200			

AF-650 GP™ General Purpose Drive

Built for ... constant torque

The AF-650 GP drive is designed for control of mixers and material handling applications. It also provides vector modes (advanced, sensorless and closed loop) for those demanding torque applications. And the rock-solid aluminum base delivers the mechanical stability needed to maintain reliability in harsh environments.



NEMA 12/IP55 shown

Drive types

AF-650 GP ratings (Heavy Duty)

kW	230V 3Ph	400/460V 3Ph	575V 3Ph	690V 3Ph
0.25	IP20, NEMA 1 kits	IP20, NEMA 1 kits	IP20, NEMA 1 kits	
0.37				
0.75				
1.5				
2.2	IP55/ NEMA 12	IP55/ NEMA 12	IP55/ NEMA 12	IP21/ NEMA 1
3.7				
5.5	IP66/ NEMA 4	IP66/ NEMA 4	IP66/ NEMA 4	IP55/ NEMA 12
7.5				
11				
15				
18.5		IP00, NEMA 1		IP00, NEMA 1
22				
30				
37				
45		IP54/ NEMA 12		IP54/ NEMA 12
55				
75				
90				
110		IP21/ NEMA 1		IP21/ NEMA 1
132				
160				
200				
250		IP54/ NEMA 12		IP21/ NEMA 1
315				
355				
400				
450		IP21/ NEMA 1		IP21/ NEMA 1
500				
560				
630				
710		IP54/ NEMA 12		IP54/ NEMA 12
800				
900				
1000				

Fully functional, fully ready

- Self protecting features
- Field installed network options: Profibus DP, Profinet, Modbus TCP/IP, Ethernet/IP and DeviceNet
- 150% current overload up to 1 minute
- Flying start (catch a spinning motor)
- Precise stop function
- Electronic thermal overload
- Easy to use PC software
- Energy monitoring feature
- Modbus RTU
- Speed and process PID controls
- Advanced brake control
- Encoder feedback
- Standards: CE, UL, cUL, C-Tick

Stand-alone drive types

For drives rated up to and including 75kW

- IP20/chassis
- IP21/NEMA 1 Field Installed Kit
- IP66/NEMA 4

For drives rated 90kW or more

- IP00/chassis
- IP21/NEMA 1

For all drives

- IP54 /55/NEMA 12




Everything you need is built in

AF-6 Series drives range from 0.25 to 1200kW, each in a compact package, each with a host of built-in features that heighten performance, reduce energy consumption, simplify installation and eliminate the need for many costly add-ons. With the AF-6 Series, you get a drive already in tune with your application, in the most cost-efficient and space-efficient manner possible.

Introducing the AF-6 Series:

- AF-60 LP™ Micro Drive – up to 22kW
- AF-600 FP™ Fan & Pump Drive – up to 1200kW
- AF-650 GP™ General Purpose Drive – up to 1000kW in Heavy Duty

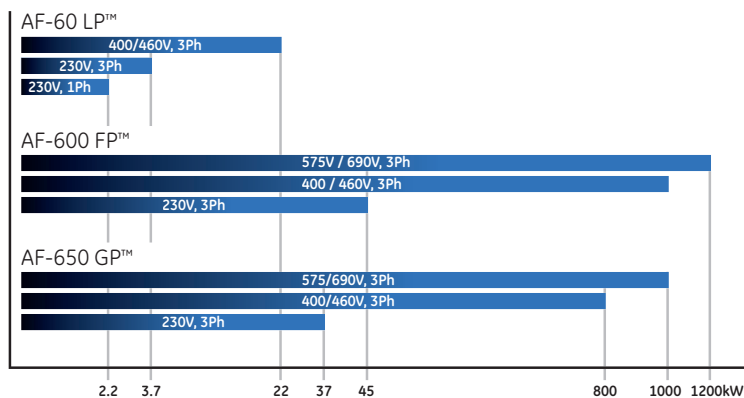

Your need	The AF-6 answer
High quality, reliable products that meet local and global standards.	A full range of GE drives up to 1200kW that deliver built-in functionality, a compact size, long life and all relevant global standards.
Quick, easy installation to make you more efficient.	The Quick Menu allows you to set up a drive in less than 5 minutes. Full documentation is shipped with every drive.
Easy access to product information and knowledgeable technical support.	Innovative electronic tools provide easy access to accurate technical data. Our technical support teams answer your questions.



The use of GE's AF-6 Series drives will significantly **reduce energy consumption**.

For example, the installation of ten AF-600 FP Fan & Pump drives will result in:

- **78% reduction** in kilowatt hours
- **€ 21765** in annual energy savings
- **9 month** simple project payback

The same application will avoid **17 metric tons per year** in CO₂ emissions. That is the equivalent of planting **500 m²** of new trees.

Data based on each drive rated at 10HP (7.5kW) applied to an HVAC system operating for 12 hours per day at 60% speed, versus applying mechanical devices to a system running at 100% speed, at a commercial electricity price of euro 0.11 per kilowatt hour.

GE Energy Industrial Solutions Ltd
Houghton Centre
Salthouse Road
Blackmills
Northampton
NN4 7EX
United Kingdom
Customer Service
Tel. 0800 587 1239
Fax 0800 587 1251
e-mail: order.consind@ge.com

General Electric International, Inc
1101, City Tower 2,
Sheikh Zayed Road
P.O. Box 11549, Dubai
United Arab Emirates

Customer Service
Tel. +9714 313 1202

ecomaginationSM
a GE commitment



GE imagination at work